J600AL SERIES

www.jingyugroup.com

LED PLASTIC BULKHEAD

Housing: UV Stabilized high Polycarbonate (PC).

Diffuser: UV Stabilized Light diffusion

Diffuser colour: Frosted

Glow wire test according to IEC 695-2-1: 850° C

IP rating: IP 66

IK rating: IK 10 (Impact test)

ErP: 1000hours & 6000hours.

J600AL1

J600AL2

J600AL1-TG12W

Watt: 12W
Lumen: 1200lm
Size: ⌀300x90mm
CCT: 3000K / 4000K / 6500K
Colour: White / Black / Grey

J600AL1-TS12W (WM Sensor)

Watt: 12W
Lumen: 1200lm
Size: ⌀300x90mm
CCT: 3000K / 4000K / 6500K
Colour: White / Black / Grey

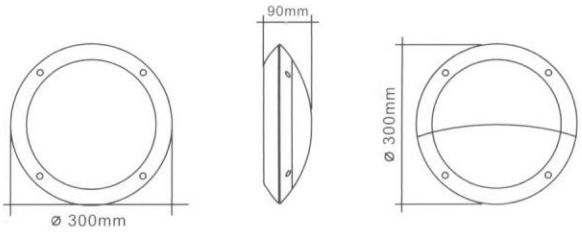

ISO9001:2000